

HD VIDEO Converter

User Manual

HDMI TO SCART Converter

Bring High-Definition to your life!

Thank you for purchasing our product. To ensure safety and many years'

trouble-free operation of the product, please read the manual carefully before using this product.

1.0 INTRODUCTION

The MHL/HDMI to SCART converter which will convert digital MHL/HDMI video and audio signal to composite video signal and the FL / FR stereo audio signal, while support DVI system sideline signals. Help users convert the high quality of the HDMI signal and smart Phone MHL signal to normal CVBS signal (standard-definition 480i, 576i,). So that can play on CRT TV, VHS VCR, DVD recorders, etc. The MHL/HDMI to SCART converter support NTSC and PAL TV formats output.

2.0 FEATURES

1. No need to install drivers, portable, flexible, plug and play.
2. High quality scaling technology for input resolutions .
3. Support NTSC and PAL two standard TV formats output.
4. Compatible with HDMI1.3
5. Share your smart phone photos, music and movies on the TV.

3.0 PACKAGE CONTENTS

Before attempting to use this unit please check the packing and make sure the following items are contained in the shipping carton:

- (1)HDMI TO SCART Converter-----1Pcs
- (2)5V DC Power Supply-----1Pcs
- (3)User Manual-----1Pcs


4.0 SPECIFICATIONS

Input port -----	1xHDMI
Output port -----	1xSCART
Dimensions(mm) -----	100(D)x102(W)x25(H)
Wight (g) -----	
Input Resolution -----	640x480 @60Hz,800x600 @60Hz, 1024x768 @60Hz,1280x720 @60Hz, 1280x1024 @60Hz,1360x768 @60Hz, 1600x1200 @60Hz,1920x1080 @60Hz, 480i/60Hz, 480p/60Hz, 576i/60Hz, 576p/60Hz, 720p50/60Hz,1080i50/60Hz, 1080p23.97/24/25/50/59.94/60Hz.
CVBS output -----	PAL,NTSC
Operating Temperature -----	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature -----	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity -----	20 ~ 90% RH (Non-condensing)
Power Consumption (Max) -----	3W

5.0 PANEL DESCRIPTIONS

HDMI TO SCART CONVERTER

Please study the panel drawings below and become familiar with the signal input(S),output(S)and power requirements.

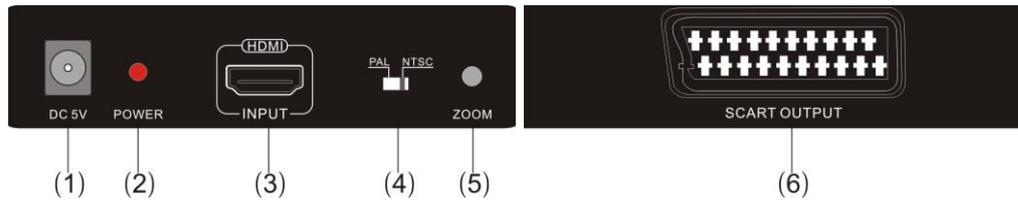

- (1) DC 5V: Plug the 5VDC power supply into the unit and connect the adaptor to AC wall outlet.
- (2) LED indicator: When the DC5V power on, the indicator will be light.
- (3) HDMI Input: Connect the HDMI to your source equipment such like DVD/Game console.
- (4) PAL/NTSC Switch: Switch the CVBS output format.
- (5) ZOOM: Screen zoom button.
- (6) SCART output: Connect the SCART output to your display equipment (like TV SET).

6.0 CONNECTION AND OPERATION

- 6.01 Connect the HDMI Cable between HDMI signal source and HDMI INPUT of converter.
- 6.02 Connect the SCART Cable between converter and SCART display.
- 6.03 Connect the power adapter between converter and outlet. Open the power supply of HDMI signal source and the display. Choose corresponding input ports, then it works.

WARNING

- 1、 Do not expose this apparatus to rain, moisture, dripping or splashing and that no objects filled with liquids, such as vases ,shall be placed on the apparatus.
- 2、 Do not install or place this unit a bookcase, built-in cabinet or in another confined space ensure the unit is well ventilated.
- 3、 To prevent risk of electric shock or fire hazard due to overheating, do not obstruct the unit's ventilation openings with newspapers, tablecloths, curtains, and similar items.
- 4、 Do not install near any heat sources such as radiators, heat registers, Stoves or other apparatus(including amplifiers)that product heat.
- 5、 Do not place sources of naked flames, such as lighted candles, on the unit.
- 6、 Clean this apparatus only with dry cloth.
- 7、 Unplug this apparatus during lightning storms or when unused for long periods of time.
- 8、 Protect the power cord from being walked on or pinched particularly at plugs.
- 9、 Only use attachments/accessories specified by the manufacturer.
- 10、 Refer all servicing to qualified service personnel.

HDMI TO SCART CONVERTER

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzine to clean this unit.